

### Technical Specifications

- Capacity: From 300 kg to 500 kg
- Travel: 900 to 2700 mm
- Closed Height: 240 - 360 mm
- Length: 1200 - 1600 mm
- Width: 1100 - 1500 mm
- CE-Marked and comply with European Norms and Standards
- 2 Safety lock for maintenance
- Safety trip bar in aluminum
- Available in Ral Colors
- Protective bellow for all models



**NOTE: ALL DETAILS CAN BE CUSTOMIZED FOR YOUR NEEDS**

OndLift is biggest manufacturer company in Lifting Tables sector in Turkey and exporting 32 countries.

OndLift' s Lift Tables series, designed for high lifting capacities and performance of applications.

OndLift' s Lift Tables series can be the manufacturing with different kind of options, such as mobile base, load- ing flaps, guard rails, rollers. (for detailed information, please check Lift Table Accessories Datasheet ).

OndLift' s Lift Table series, have a vital role to create ergonomic and safe working conditions. Can be the best selection of challenging situations, high lifting capacities, intense pace of work.

For more information [www.ondlift.com](http://www.ondlift.com)

### Mobile Type



### Column Type




### Low Profile Type



Art No	Model	Capacity kg	Platform Dimension LxW mm x mm	Lift Stroke H mm	Closed Height C mm	Lift Time sec	Motor kW	Weight kg
90.03.001	EXT.1/03-09	300	1400 x 1100	900	240	18	1,5	350
90.03.002	EXT.2/03-18	300	1400 x 1100	1800	280	35	1,5	450
90.03.003	EXT.3/03-27	300	1400 x 1100	2700	360	50	1,5	550
90.03.100	EXT.1/03-08-LP	300	1450 x 1140	760	85	21	0,75	280
90.03.101	EXT.1/03-10-LP	300	1610 x 1140	970	85	25	0,75	300
90.03.200	EXT.1/03-09-H	300	1400 x 1100	900	240	18	1,5	350
90.03.300	EXT.1/03-09-C	300	1400 x 1100	900	100	18	1,5	-
90.03.301	EXT.1/03-18-C	300	1400 x 1100	1800	100	30	1,5	-
90.03.302	EXT.1/03-27-C	300	1400 x 1100	2700	100	48	1,5	-

## Standard Pit Details

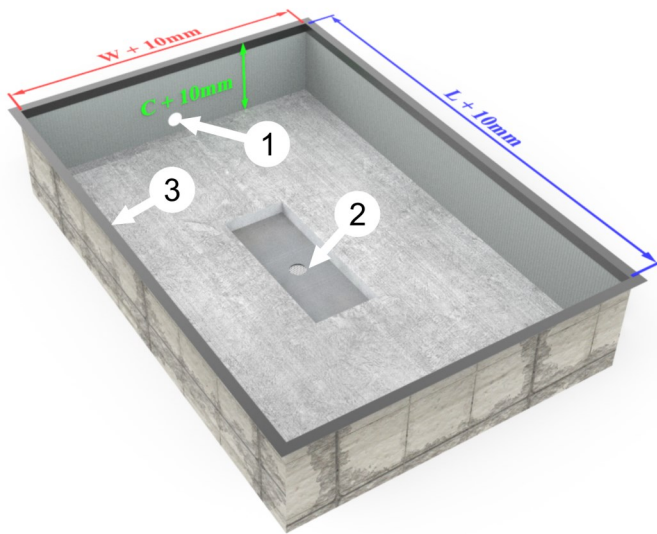

When a lifting table is installed in a pit, the pit should be constructed according to the illustration on the left.

W = Width of the platform  
L = Length of the platform  
H = Lowest height of the lift table

The pit's ballast material must at least meet the concrete classification C12/15.

The hydraulic power pack for lifting tables in an outdoor environment should, where possible, be externally located in a covered or indoor environment.

1- Pipe for incoming cables, 100 mm in diameter. The fixed side of the lift table.

2- Drainage holes where required. This is centre of the pit should be 80 mm.

3- L-shaped profile 100 x 100 mm to reinforce the pit edges.

### ONDLIFT Mak. San. Tic. Ltd. Şti

**Factory:** Organize Sanayi Bolgesi 2004 Cad. No: 4  
Turgutlu/Manisa/TURKEY

**Showroom:** İmes San. Sit. C.302 Sk. No:13  
Y.Dudullu/Umraniye/Istanbul/TURKEY

Tel: 0090 236 332 5050

ondlift@ondlift.com

Product specifications are subject to change without any notice or obligation. The photographs and/or drawing in this documents are for illustrative purpose only. All productions of OndLift, manufacturing for CE standards.

**Turkey**  
Discover the potential

Onder Lift Celik



**43rd Years Anniversary**

Your warehous partner

Onder Group Company